


Wet Location Fluorescent



Fluorescent linear fixture UL rated for wet locations
Clear, UV-stable acrylic for retained clarity and seamless housing to prevent moisture intrusion
For use in meat processing plants, dairy facilities and industrial hose down areas

Dimensions

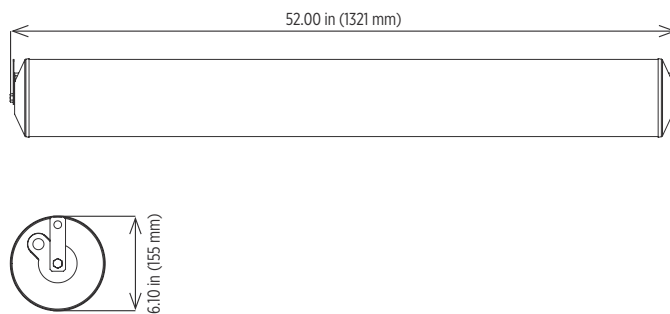

Specifications

Construction	Impact-resistant, UV-stabilized acrylic housing
Hardware	Stainless steel external hardware
Lens	Clear, acrylic lens
Light source	Accepts two T5HO fluorescent lamps 54W Lamps not included
Power source	120-277V Electronic ballast
Wiring	12.00 inch (305 mm) #16 AWG3 conductor cable without plug - standard
Mounting	Mounting accessories sold separately 1 foot stainless steel chain mounting kit (SSCK-1) 2 foot stainless steel chain mounting kit (SSCK-2) 8 foot stainless steel chain mounting kit (SSCK-8)
Weight	21.0 lb (9.5 kg)
Warranty	1 year

Contact factory for IES files

Compliances

- UL/cUL Listed to:
- UL 1598 Suitable for Wet Locations
 - NEMA 4X



Meets the requirements of the
Buy American Act (BAA) and/or the
American Recovery and Reinvestment Act (ARRA)



Ordering Information

Example: LFP-454


Fixture	Length/Wattage
LFP	454

Length/Wattage

454 F54 T5HO (mini bi-pin)

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Accessories (order separately for field installation)



Stainless Steel Chain Mounting Kit

- 1 foot (SSCK-1)
- 2 foot (SSCK-2)
- 8 foot (SSCK-8)

Product design and specifications are subject to change without notice. The most current version of this specification sheet can be found on our website: www.phoenixlighting.com.