

! CAUTION

- All wiring should be done by a licensed electrician in accordance with state codes, local codes, and National Electric Code (NEC) standards or International Electric Commission (IEC) standards.
- Improper installation may result in serious injury and void warranty.
- Contains parts and assemblies susceptible to damage by electrostatic discharge (ESD).
- When using luminaires, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury.
- Surge protective devices should be utilized for fixtures installed in environments subject to power surges outside the specified operating parameters.

Installation

- Identify the desired mounting location for the fixture. Note that the Cube-Light can be mounted in any orientation.
- The fixture should be mounted using the flush mount brackets (Item 5), and M6 or ¼ inch screws and lockwashers (not provided).
- Electrical connections should be made by a licensed electrician. When wiring the fixture, please refer to the table below.

Wiring

If fixture is provided with power cord, mount fixture as instructed above, and connect cord to supply line in water tight junction box. Connect the wires: black to line, white to neutral, green to ground.


If fixture is provided without cord, open back cover of fixture to access wiring compartment. Install cord(s) through cord grips provided. Cord grips accept cord of diameter 0.25 inches (6.35 mm) to 0.375 inches (9.5 mm). Tighten cord grip to cord, hand tight plus ¼ turn. Connect the wires: brown to line, blue to neutral, yellow/green to ground. Neatly tuck wires and connectors into wiring compartment, place cover and gasket, attach with four screws. Tighten screws to 6 pound-inch. Mount fixture as instructed above.

To ensure a proper seal when installing a new cord grip or plug into the housing, it should be torqued to 80-90 inch-pounds.

When installing additional cord grips or plugs, thread sealing tape or paste is required.

Repair Parts List

Item	Part Number	Description
1	000082.900	lens kit
3	7537800	plug
4	4035068 4035065	½ inch NPT cord grip (0.25-0.38 inch cord OD) ½ inch NPT cord grip (0.38-0.50 inch cord OD)
5	000082.904	mounting bracket kit
6	000082.902	back cover plate kit

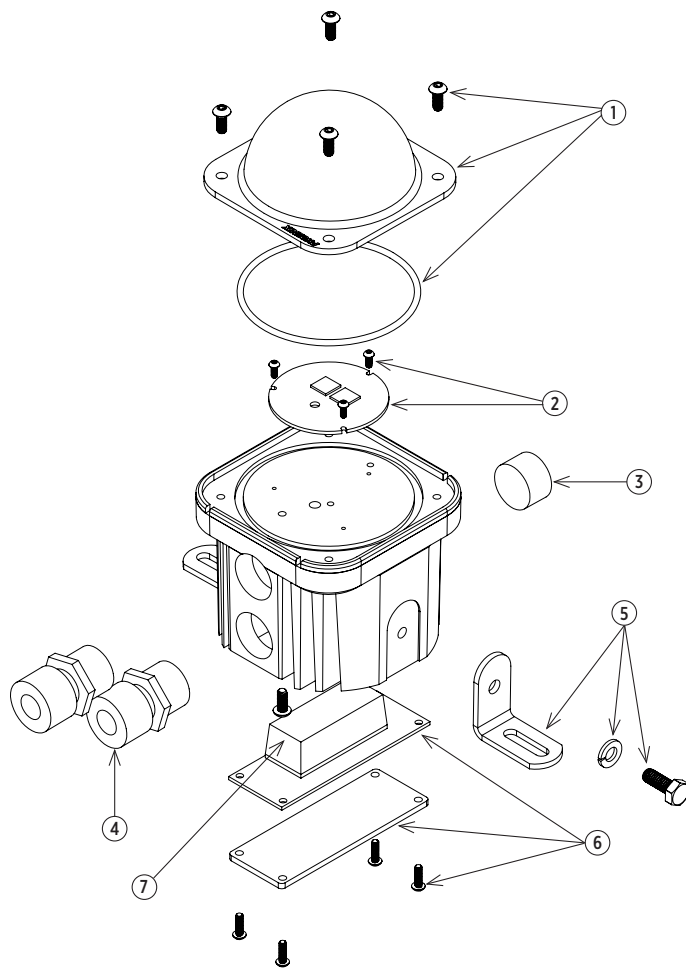

Fixture weight: 2.0 lb (0.9 kg)
Fixture dimensions: 3.50 in (89 mm) x 3.50 in (89 mm) x 4.20 in (107 mm)

