

! CAUTION

- **Shock hazard** — ensure power is disconnected prior to opening fixture. Line voltage runs directly to the circuit board.
- All wiring should be done by a licensed electrician in accordance with state codes, local codes and National Electric Code (NEC) standards or International Electrotechnical Commission (IEC) standards.
- Improper installation may result in serious injury and void warranty.
- May contain parts and assemblies susceptible to damage by electrostatic discharge (ESD).
- When using luminaires, basic safety precautions should always be followed to reduce the risk of fire, electric shock and personal injury.

Included in the Cube-Light Lens Kit: lens, o-ring and four (4) M4 x 10 mm screws.

Installation

1. Disconnect power to fixture.
2. Remove the four (4) M4 x 10 mm screws securing the existing lens to the fixture. Refer to Figure 1. Keep these screws for later use. **Note:** Four (4) spare screws are included in the Cube-Light Lens Kit.
3. Discard existing lens and replace with new lens.
4. Remove o-ring and replace with provided o-ring.
5. Reinstall four (4) M4 x 10 mm screws into the lens. Refer to Figure 2. Torque to 15 inch-pounds.

Figure 1


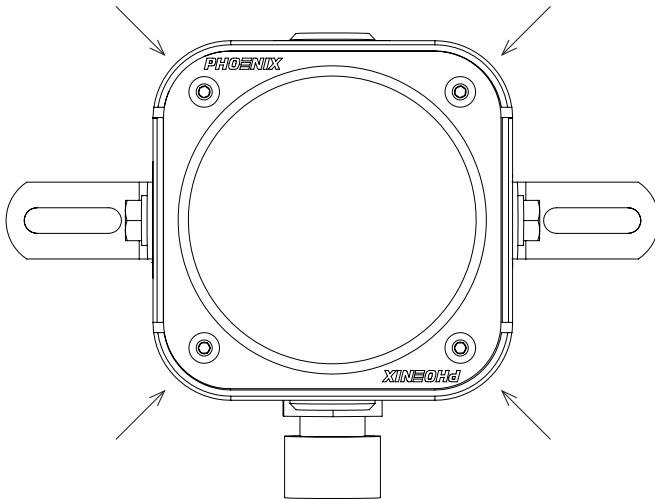


Figure 2



Product design and specifications are subject to change without notice.

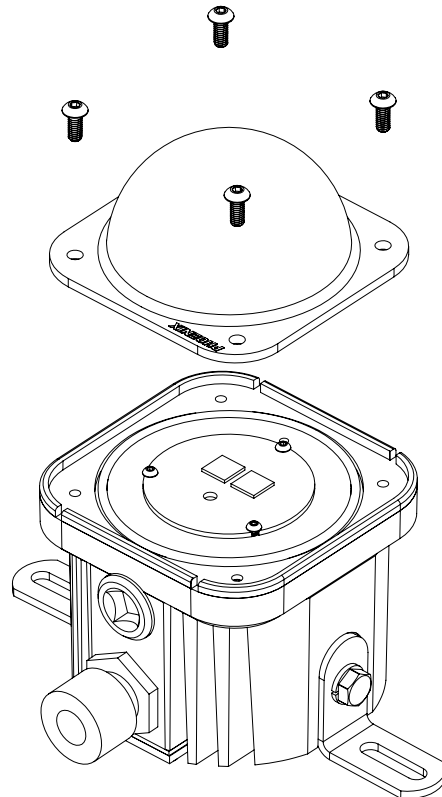