

HAZARDOUS-RATED LIGHTING

LFXB LED Series EXPLOSION-PROOF LINEAR LED

This UL844 Class I, Division 1 explosion-proof linear light is offered in a 2-foot and 4-foot version.

Key Specifications

- **Voltage:** 120-277VAC
- **Input Power:** 35W; 65W
- **Lumens:** up to 4,200 and up to 8,400
- **CCT:** 5000K; 4000K; 3000K



Defend Flood™ 2 Series HAZARDOUS-RATED LED FLOODLIGHT

This UL844 Class I, Division 1 explosion-proof floodlight offers a range of voltage, lumen, and mounting options, delivering reliable illuminations across many uses in demanding industrial settings. Available in two constructions: Defend Flood LO or HI.

Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** 40W; 60W; 100W; 200W
- **Lumens:** 5,600; 8,400; 14,000; 28,000
- **CCT:** 5000K; 4000K; 3000K



SLX/SLXP/DLX EXPLOSION-PROOF LED FLOODLIGHT

This UL844 Class I, Division 1 explosion-proof series is available as a dock light, floodlight and portable task light.

Key Specifications

- **Voltage:** 120-277VAC
- **Input Power:** 44W
- **Lumens:** Up to 4,600
- **CCT:** 5000K



HDL-LED Series HAZARDOUS-RATED LINEAR LED

This UL844 Class I, Division 2 series has a compact, low profile design. Available with 1, 2, or 3 circuit boards.

Key Specifications


- **Voltage:** 120-277VAC
- **Input Power:** 28W, 55W, 84W
- **Lumens:** Up to 3,150; up to 6,300; up to 9,400
- **CCT:** 5000K; 4000K



LED VP Series

HAZARDOUS-RATED, VAPORPROOF LED FIXTURE

This popular vaporproof Jelly Jar fixture is UL844 hazardous-rated and ABS certified making it ideal for walkway, doorway, and perimeter lighting within industrial and marine settings. Available in aluminum or brass.

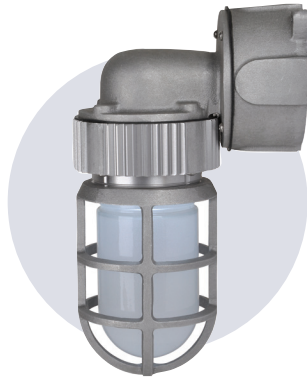


Key Specifications

- **Voltages:** 120-277VAC; 24VDC option
- **Input Power:** 17W
- **Lumens:** Up to 1,900
- **CCT:** 5000K; 3000K

CVO 2

HAZARDOUS-RATED, FIELD-ADJUSTABLE LED AREA LIGHT

This flexible LED area is UL844 hazardous-rated and field-adjustable delivering up to 11,000 lumens at 75W with versatile voltage and mounting options.

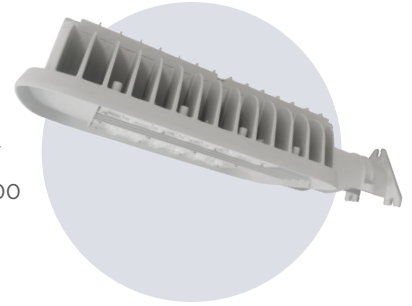

Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** Field-adjustable output up to 75W
- **Lumens:** Up to 11,000
- **CCT:** 5000K; 2200K; Amber

ModCom® 3 Series

HAZARDOUS-RATED LED FLOODLIGHT

Heavy-duty, UL-844 hazardous-rated floodlight engineered to withstand excessive impact, vibration, and saltwater environments. Ideal for industrial, marine, and mining environments. Available in 3 constructions: LO, HI, MAX



Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** 121W; 231W; 438W
- **Lumens:** 15,000; 30,000; 52,500
- **CCT:** 5000K; 4000K; Amber

Guard Pro™ Series

HAZARDOUS RATED LED LOW-BAY & HIGH-BAY

Available in 3 constructions: LO, HI, MAX. It's robust, IP66-sealed construction shrugs off corrosive vapors, high-pressure washdowns, dust and debris.



Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** 20W, 40W, 60W, 100W, 150W, 200W, 300W, 350W, 400W
- **Lumens:** 2,600; 5,200; 7,800; 13,000; 19,500; 26,000; 39,000; 45,000; 52,000
- **CCT:** 5000K; 4000K; 3000K; Amber

ReadiLED™ HAZ

HAZARDOUS RATED LED SNAPLIGHT

Vibration-resistant for demanding environments. Marine grade construction for superior corrosion resistance.



Key Specifications

- **Voltage:** 120-277V, 347-480V
- **Input Power:** 35W
- **Lumens:** 5300
- **CCT:** 4000K

Command Flood® Series

HAZARDOUS-RATED LED FLOODLIGHT

UL844 Class I, Division 2 hazardous-rated LED floodlight delivers 18,500-48,000 lumens with versatile voltage and mounting options. Available in three constructions: Command Flood 150, 250, or 375.



Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** 145W; 240W; 360W
- **Lumens:** 18,500; 32,000; 48,000
- **CCT:** 5000K; 4000K; 2700K