



Modular *docklite*[®] Fan

18 Inch Adjustable Fan

3 speeds provide up to 4800 CFM circulation to maintain air flowing in the trailer

Fan rotates vertically and horizontally for best positioning

Use with double strut arm for warehouses, workshops and other industrial applications

Mount above or below arm

Key Applications

Loading Docks
Warehouses
Factories

Compliances

ETL/cETL Certified to:
• UL 507


Specifications

Construction	Aluminum blade, steel guard and mounting harp
Finish	Black powder coat
Hardware	Mounting hardware provided - ½ inch hexbolt and four (4) washers
Motor	120V, 50/60 Hz
Speeds	3
Controls	Pull chain
Air flow cubic feet/minute (CFM)	Low - 2750 CFM Medium - 3650 CFM High - 4800 CFM
Air flow cubic meter/second	Low - 6.70 m/s Medium - 8.30 m/s High - 9.60 m/s
Current	High - 0.85 AMP
Power	High - 100 watts
Noise	Low - 45 dB A Medium - 52 dB A High - 60 dB A
Wiring	Provided with 6 foot three conductor cord with recessed 3-prong IEC type (C-14) plug (120V, 60 Hz only)
Mounting	Adjustable, black powder coated steel mounting harp
Weight	Packaged: 13.2 lb (6.0 kg) Actual: 11.0 lb (5.0 kg)
Warranty	1 year

Modular docklite® Fan

18 Inch Adjustable Fan

Dimensions

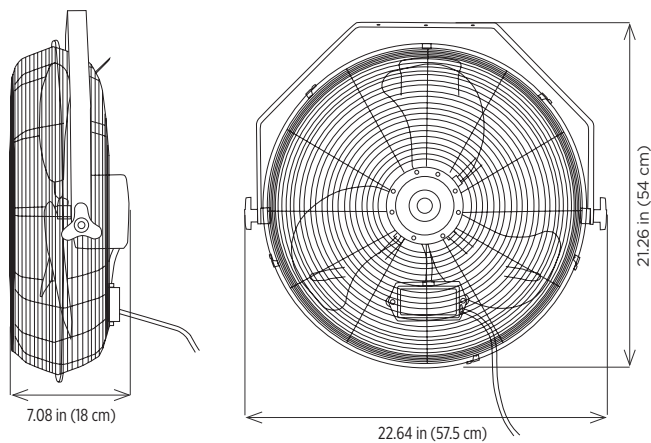

Ordering Information

Example: DL-FAN-18

Series	Type	Size
DL	FAN	18

Series	Type	Size
DL	Docklite FAN Fan	18 18 inch

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Product design and specifications are subject to change without notice. The most current version of this specification sheet can be found at www.phoenixlighting.com.