



Modular *docklite*[®] Fan

18 Inch Adjustable Fan

Three speeds deliver up to 4800 CFM airflow to maintain circulation

Fan rotates vertically and horizontally for optimal positioning

Use with double strut arm for warehouses, workshops,
and other industrial applications

Mount above or below arm

Key Applications

Loading Docks
Warehouses
Factories

Compliances

ETL/cETL Certified to:
• UL 507


Specifications

| | |
|--|--|
| Construction | Aluminum blade, steel guard and mounting harp |
| Finish | Black powder coat |
| Hardware | Zinc plated steel |
| Motor | 120V, 50/60 Hz |
| Speeds | 3 |
| Controls | Rotary knob |
| Airflow cubic feet/ minute (CFM) | Low - 2750 CFM Medium - 3650 CFM High - 4800 CFM |
| Air speed cubic meter/ second | Low - 6.70 m/s Medium - 8.30 m/s High - 9.60 m/s |
| Current | High - 0.85 A |
| Power | High - 100 W |
| Noise | Low - 45 dBA Medium - 52 dBA High - 60 dBA |
| Wiring | Provided with 39 inch three conductor cord with recessed 3-prong IEC type (C-14) plug (120V, 60 Hz only) |
| Mounting | Adjustable, black powder coated steel mounting harp |
| Weight | Packaged: 13.2 lb (6.0 kg) Actual: 11.0 lb (5.0 kg) |
| Warranty | 1 year |

Modular docklite Fan

18 Inch Adjustable Fan

Dimensions

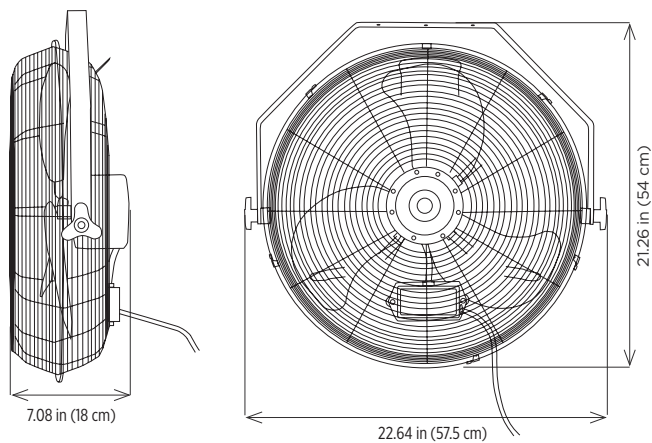

Ordering Information

Example: DL-FAN-18

| Series | Type | Size |
|--------|------|------|
| DL | FAN | 18 |

| Series | Type | Size |
|--------|------------------|------------|
| DL | Docklite FAN Fan | 18 18 inch |

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Product design and specifications are subject to change without notice. The most current version of this specification sheet can be found at www.phoenixlighting.com.