

Polycarbonate Loading Dock Light Head

Built for stability and smooth operation

Durable design in safety yellow for maximum visibility

Designed to replace up to 150W incandescent light heads

Compatible with all Phoenix docklite arms



Key Applications

Loading dock lighting
Truck trailer lighting
Task lighting
Maintenance lighting

Compliances

UL/cUL Certified to:




- UL153: portable work light suitable for dry locations

Specifications

Construction	High temperature polymer housing Zinc plated steel wire lamp guard
Hardware	Zinc plated steel
Light source	Optional 1200 lumens, 15W, PAR 38 LED lamp available (LMP) Accepts up to 50W self-ballasted LED lamp
Power source	120V, 60Hz
Wiring	22.00 inch (559 mm) cord - standard Recessed 3-prong IES type (C-14) type plug
Ambient operating temperature	-40°C to +25°C
Mounting	Zinc-plated harp
Estimated weight	Fixture: 2.0 lbs (0.91 kg) Packaged: 3.0 lbs. (1.40 kg)
Warranty	3 years

For IES files, see website or contact factory

Dimensions

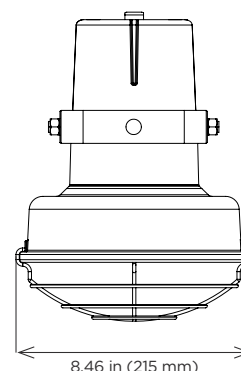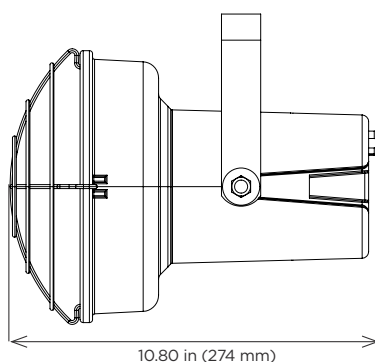

Modular *docklite*® Head

Polycarbonate Loading Dock Light Head



Ordering Information

Modular Head

Example: DL-LED-LH

Fixture	Type	Part	Options¹
DL	LED	LH	LMP

Options¹

LMP Provided with lamp (1200 lumens)

Notes

1 Standard unit is supplied without lamp.

Modular Arm (order separately)

Example: DLSD-40-ARM-DS

Series	Length	Part	Construction
DLSD	40	ARM	DS
	60		

Length

40 40 inch arm
60 60 inch arm


Construction

DS double strut arm


Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Double Strut Arms


40 inch Arm Effective Reach
DLSD-40-ARM-DS

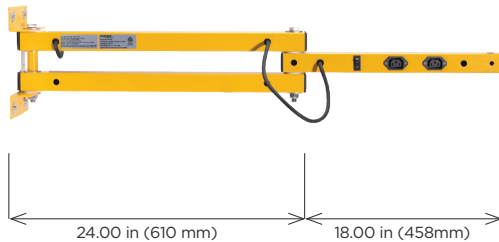

60 inch Arm Effective Reach
DLSD-40-ARM-DS

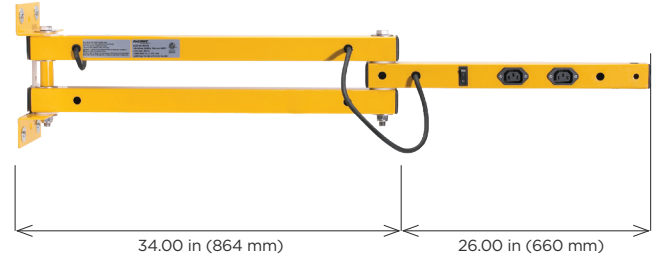

Accessories



Fan
DL-FAN-18