

## Marine Industrial LED Floodlight



Designed to withstand moisture and corrosion found in marine and industrial installations

Rugged yet lightweight design

Customized mounting brackets for quick and easy installation

Stainless steel bracket and hardware for maximum corrosion resistance

Designed and manufactured in the USA

### Key Applications

- Outdoor perimeters
- Maritime vessel decks
- Overhead cranes
- Gantry cranes
- General area lighting
- Monument and landscape lighting

### Compliances

UL/cUL Certified to:

- UL 1598 Suitable for Wet Locations
- UL 1598A Marine Outside Type (Saltwater)
- CSA C22.2 No. 250.0

ABS

IP66

LM79 and LM80 reports available upon request

### Specifications

<b>Construction</b>	Marine grade, aluminum housing Adjustable 316 stainless steel mounting harp (SSHRP) Adjustable waterline security bracket (NPL) (CF-125 only)
<b>Finish</b>	Type II anodized finish per MIL-A-8625
<b>Hardware</b>	Marine grade (316) stainless steel
<b>Lens</b>	Weatherproof, clear polycarbonate

### Specifications

<b>Light source</b>	CF-125, 120W, up to 15,300 lumens CF-250, 240W, up to 32,000 lumens CF-375, 360W, up to 48,000 lumens CRI > 70 50,000 hour rated life Cool white 5000K (CW), neutral white 4000K (NW) or warm white 2700K (WW) LEDs
<b>Power source</b>	120-277V, 50-60Hz or 277-480V, 50-60Hz Overload, over-voltage, over-temperature and short-circuit protection
<b>Surge protection</b>	6kV line to line; 10kV line to earth 10 kV/kA
<b>Wiring</b>	Stranded wires Optional 17 gauge, 3 conductor cord (CD), 72.00 in (1829 mm) (CF-250 and CF-375 only) or 120.00 in (3048 mm) (CF-125 only) Standard cord grip 6 - 12 mm (0.24 - 0.47 in) Optional junction box, without cord (JBOX)
<b>Vibration</b>	5 Grms, 100-2200 Hz
<b>Ambient operating temperature</b>	-40°C to + 50°C Designed for use in areas allowing air flow
<b>Humidity range</b>	0% to 100%
<b>Mounting</b>	Ceiling mount 220° harp rotation
<b>Safety cable</b>	Safety cable included
<b>Weight</b>	CF-125 model - 13.0 lbs (5.9 kg) CF-250 model - 31.4 lbs (14.2 kg) CF-375 model - 44.2 lbs (20 kg)
<b>Warranty</b>	5 years



This product complies with domestic preference requirements such as BAA or TAA. For additional information, visit [phoenixlighting.com](http://phoenixlighting.com) or consult your representative.

For IES files, see website or contact factory


# Command Flood® Series

Marine Industrial LED Floodlight


**PHOENIX®**  
DURABILITY X DESIGN™

## Dimensions


### CF-125 Model

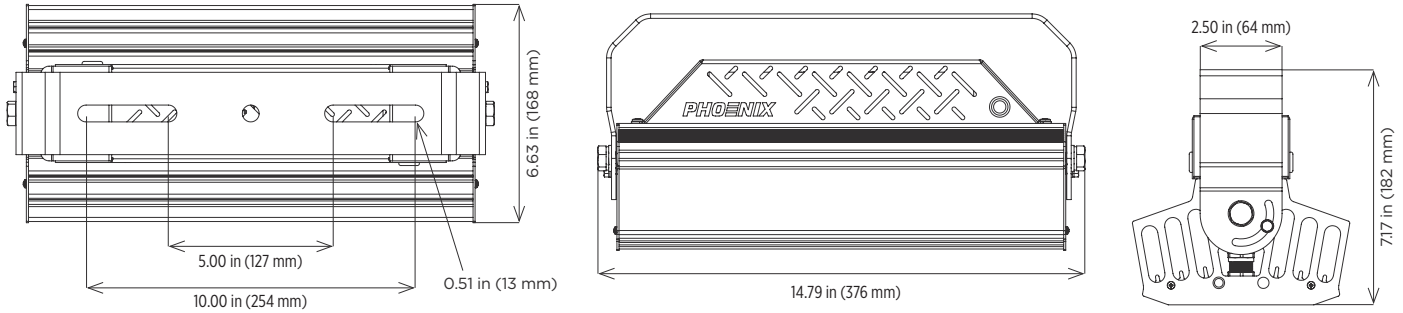

### CF-250 Model

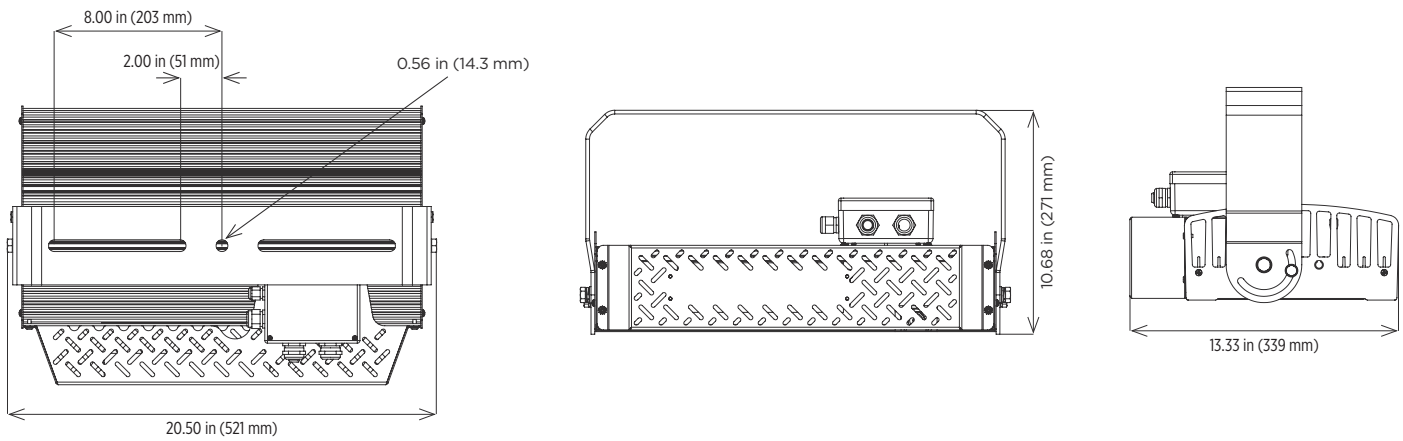

### CF-375 Model

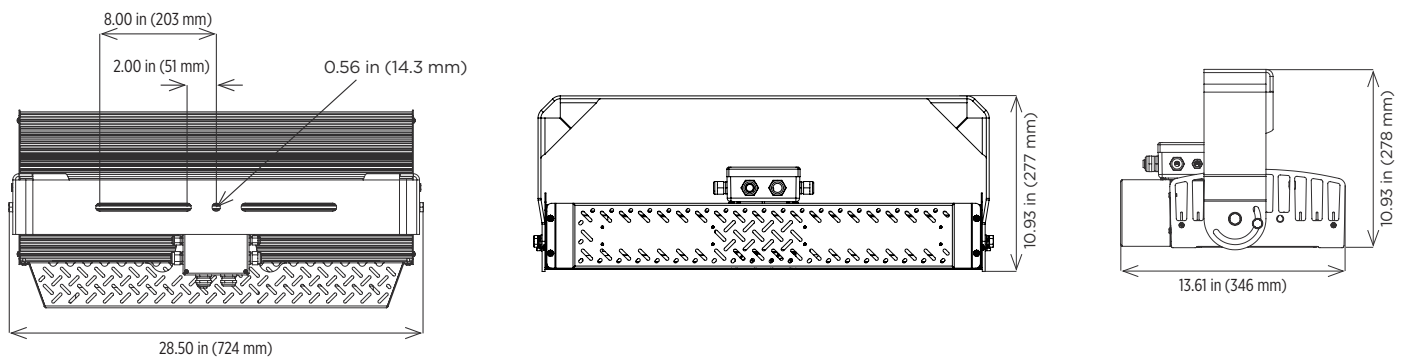

## Ordering Information

**Example:** CF-125-SP-120-277-CW-SSHRP-CD

Fixture	Model	Optic	Voltage	CCT	Mounting Bracket <sup>1</sup>	Wiring
CF	125	VS <sup>2</sup>	120-277	CW	SSHRP	JBOX
	250	SP	277-480	NW	NPL <sup>3</sup>	CD <sup>4</sup>
	375	MF		WW		
		WF				

Model	Optic	Voltage	CCT
125 120W	VS <sup>2</sup> Very narrow spot	120-277 120-277V, 50-60Hz	CW Cool white (5000K)
250 240W	SP Spot	277-480 277-480V, 50-60Hz	NW Neutral white (4000K)
375 360W	MF Medium flood		WW Warm white (2700K)
	WF Wide flood		

### Mounting Bracket<sup>1</sup>

SSHRP	Adjustable 316 stainless steel mounting bracket
NPL <sup>3</sup>	Adjustable waterline security bracket with SYM 1218.3 plug (replacement for SYM 303.X)

### Options


JBOX	Junction box, no cord included
CD <sup>4</sup>	Cord with pigtail (CF-125 model provided with 120.00 in (3048 mm) cord; CF-250 & CF-375 models provided with 72.00 in (1829 mm) cord)

### Notes

- 1 Contact factory for additional mounting options
- 2 Only available with CF-250 & CF-375 models
- 3 Only available with CF-125 models
- 4 CD models of CF-250 & CF-375 provided with cord coming out of junction box

**Special Projects:** We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

## Adjustable Waterline Security Bracket (NPL)

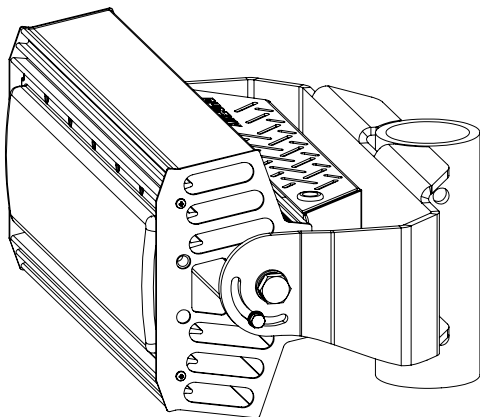

**Note:** LED replacement for SYM 303.X