

Wet location task light


Copper-free, cast aluminum housing for corrosion resistance

Available with incandescent lamp head

Steel arm with wrist-action joint available in 42 or 60 inch lengths


Dimensions

42 inch arm

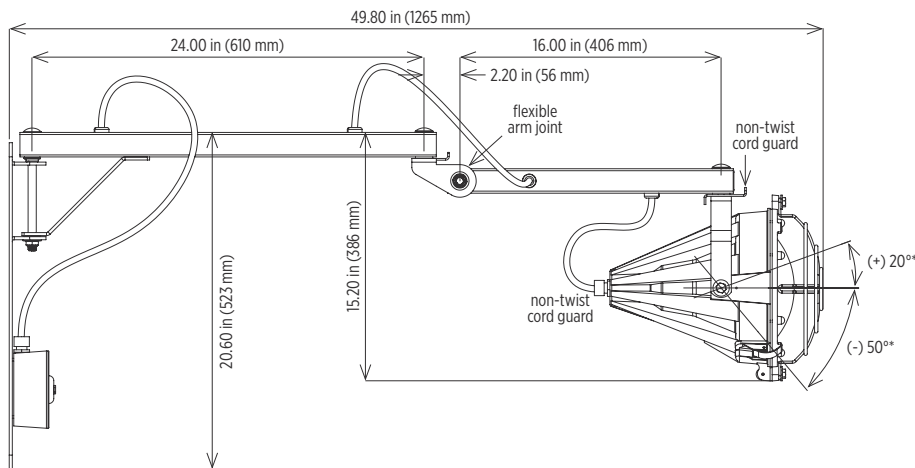

*indicates maximum adjustment of light beam axis from horizontal

Mounting Plate

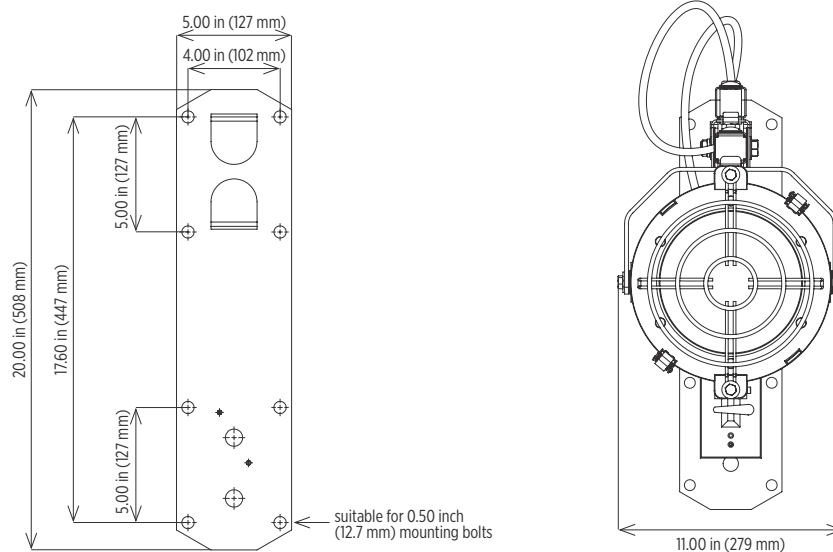

Meets the requirements of the
Buy American Act (BAA) and/or the
American Recovery and Reinvestment Act (ARRA)



Wet Location Task Light

Specifications

Construction	Copper-free, cast aluminum housing
Finish	Yellow thermoset powder coat
Hardware	Zinc plated steel
Arm	1.50 inch square steel tube with wrist-action joint 42.19 (42 inch arm) or 60.19 (60 inch arm) inch lengths
Lens	Tempered glass lens and wire guard
Light source	Incandescent BR40 and PAR38 with medium screw base, up to 300W
Power source	120V, 60Hz
Wiring	Three-conductor grounded cord from fixture to switch on wall bracket
Ambient operating temperature	+5°C to +25°C
Mounting	Zinc plated steel bracket Easy retrofit with almost any existing DWT
Weight	42 inch: 30.0 lb (13.6 kg) 60 inch: 36.0 lb (16.3 kg)
Warranty	3 years

Contact factory for IES files

Compliances

UL/cUL Listed to:

- UL 1598 Suitable for Wet Locations

CSA Certified Indoor/Outdoor

Ordering Information

Example: DL-INC-DWT-42

Fixture	Wattage/Type	Part	Length
DL	INC	DWT	42
			60

Wattage/Type

INC Incandescent (PAR38/BR40; 300W max)

Length

42 42 inch arm

60 60 inch arm

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Product design and specifications are subject to change without notice. The most current version of this specification sheet can be found on our website: www.phoenixlighting.com.

