




10W dock light designed to replace up to 150W incandescent light head

Sleek, compact design with durable plastic housing


Flexible arm and hinged bracket allow for improved aimability and enables fixture to swing away upon impact

LED technology increases efficiency, eliminates maintenance and supports green initiatives

Dimensions

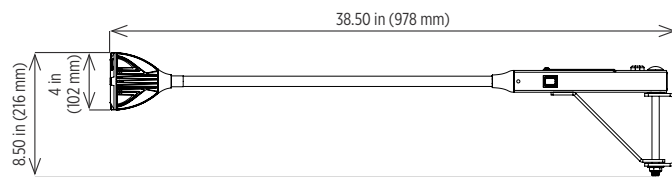

Mounting Plate



Specifications

Construction	Thermally conductive plastic housing
Hardware	304 stainless steel
Arm	Flexible tubing
Lens	Impact resistant Clear polycarbonate
Light source	Lumileds Luxeon light emitting diodes (LED) 10W, up to 1100 lumens CRI > 70 CCT 4000K 20° beam pattern 50,000 hour rated life
Power source	100-277V (pigtail) or 120V only (with NEMA 5-15 plug) Bi-level dimming standard
Wiring	72.00 inch (1829 mm) cord with three-prong plug (NEMA 5-15) (standard on 120V only) 72.00 inch (1829 mm) cord with pigtail (100-277V option)
Ambient operating temperature	-40°C to +40°C
Mounting	3x5 inch zinc plated steel bracket
Weight	7.0 lb (3.2 kg)
Warranty	3 years

Compliances

ETL/cETL Listed to:

- UL 1598 Suitable for Damp Locations
- CSA C22.2 No. 250.0

CE

IK08

LM79 report available



Ordering Information

Example: DL-FLEX-120

Fixture	Type	Voltage
DL	FLEX	120 ¹
		100-277 ²

Notes

- 1 120V fixture comes standard with three-prong plug (NEMA 5-15)
- 2 100-277V fixture will come standard with pigtail

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Product design and specifications are subject to change without notice. The most current version of this specification sheet can be found on our website: www.phoenixlighting.com.

