



# DLA 2 docklite<sup>®</sup>

## 9W Modular LED Loading Dock Light Head

US Design Patent No. D957,023

9W light designed to replace up to  
150W incandescent light heads

Fully illuminates a 53 foot trailer with an even light distribution

Durable, compact design to endure accidental impact  
LED technology increases efficiency, eliminates maintenance and  
supports green initiatives

### Key Applications

Loading dock lighting  
Truck trailer lighting  
Task lighting  
Maintenance lighting

### Compliances

ETL/cETL Certified to:

- UL 1598 Suitable for Wet Locations
- CSA C22.2 No. 250-08

IP66 (fixture)

IK10



LM79 and LM80 reports available

### Specifications

<b>Construction</b>	Cast aluminum housing
<b>Finish</b>	Safety yellow powder coat
<b>Hardware</b>	Stainless steel
<b>Lens</b>	Impact-resistant clear polycarbonate (CP)
<b>Light source</b>	Osram light emitting diodes (LED) 9W, 1100 lumens 25° square beam angle CCT 4000K 50,000 hour rated life
<b>Power source</b>	120V, 60Hz
<b>Wiring</b>	22.00 inch (559 mm) cord - standard Plug with recessed 3-prong IEC type (C-14) plug (120V, 60Hz only) - standard NEMA 5-15 plug option (120V, 60Hz only) (PLG) Push button switch on head option (SW)
<b>Ambient operating temperature</b>	-40°C to +50°C
<b>Mounting</b>	Stainless steel mounting bracket 0.53 inch (13.5 mm) mounting hole clearance
<b>Estimated weight</b>	Fixture: 2.7 lb (1.2 kg) Packaged: 3.0 lb (1.4 kg)
<b>Warranty</b>	5 years

For IES files, see website or contact factory

### Dimensions

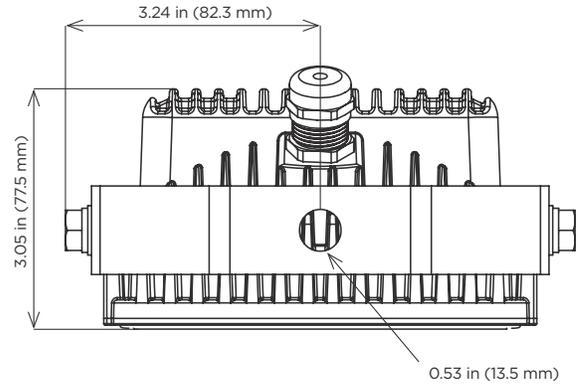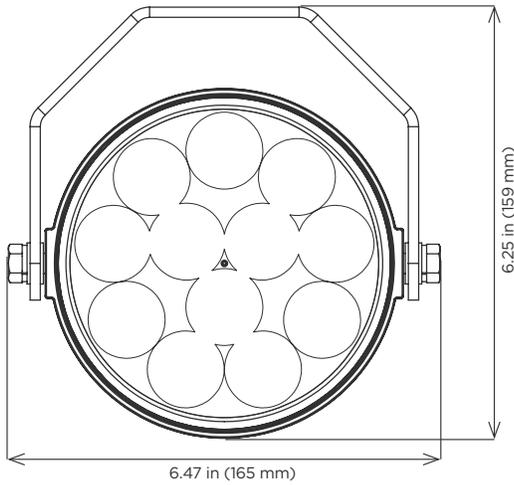


### Single Strut Arms


#### 24 inch Arm Effective Reach



#### 42 inch Arm Effective Reach

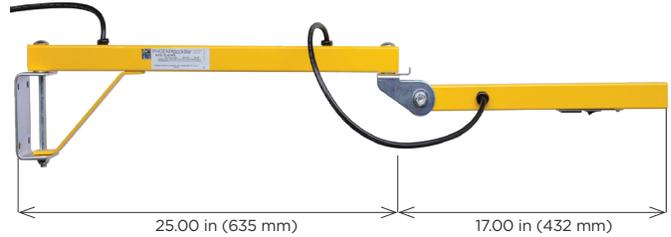

#### 60 inch Arm Effective Reach

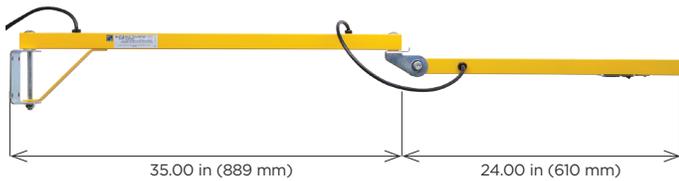

### Accessories




#### Fan


DL-FAN-18

## Double Strut Arms

### 42 inch Arm Effective Reach

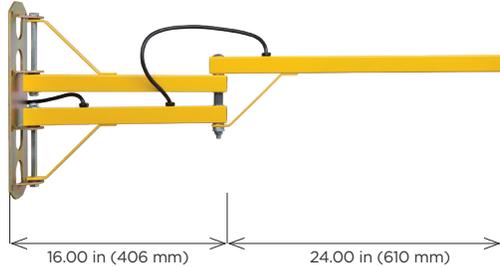

### 60 inch Arm Effective Reach

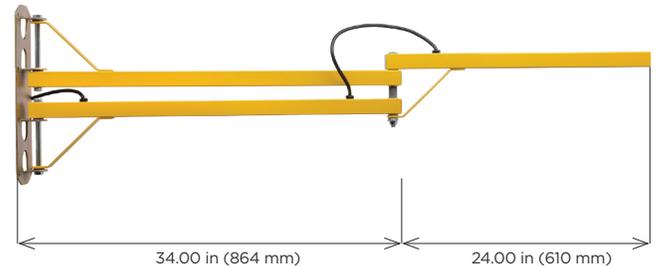

## Ordering Information

### DLA 2 LED Head

Example: DLA2-12LED

Fixture	LED Count	Options <sup>3</sup>
DLA2	12LED	PLG <sup>1,2</sup>
		SW <sup>4</sup>

#### LED Count

12LED 12 LEDs, 19W, 1100 lumens

#### Options <sup>3</sup>

PLG <sup>1,2</sup> 22.00 inch (559 mm) cord with 120V, 60Hz NEMA 5-15 plug  
SW <sup>4</sup> Push button switch on head

#### Notes

- 1 Plug is not suitable for wet environments
- 2 Optional NEMA 5-15 plug cannot be used with Phoenix docklite<sup>®</sup> Arm (below)
- 3 Fixture will come standard with recessed 3-prong IEC type (C-14) plug (120V, 60Hz only), which is necessary for use with Phoenix docklite<sup>®</sup> Arm (below)
- 4 SW option is not required when using with Phoenix docklite<sup>®</sup> Arm (below), because power switch is standard on arm.

### Modular Arm

Example: DL-24-ARM

Series	Length	Parts	Options <sup>3</sup>
DL	24 <sup>1</sup>	ARM	DS <sup>2</sup>
	42 <sup>1</sup>		
	60 <sup>1</sup>		

#### Options <sup>3</sup>

DS <sup>2</sup> double strut arm

#### Notes

- 1 120V standard.
- 2 Available in 42 and 60 inch lengths only. DL-FAN-18 requires 42 or 60 inch Double Strut Arm.

**Special Projects:** We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.