



# DLA 2 docklite<sup>®</sup>

## 9W Modular LED Loading Dock Light Head

US Design Patent No. D957,023

9W light designed to replace up to  
150W incandescent light heads

Fully illuminates a 53 foot trailer with an even light distribution

Durable, compact design to endure accidental impact  
LED technology increases efficiency, eliminates maintenance and  
supports green initiatives

### Key Applications

Loading dock lighting  
Truck trailer lighting  
Task lighting  
Maintenance lighting

### Compliances

ETL/cETL Certified to:

- UL 1598 Suitable for Wet Locations
- CSA C22.2 No. 250-08

IP66 (fixture)

IK10

LM79 and LM80 reports available

### Specifications

Construction	Cast aluminum housing
Finish	Safety yellow powder coat
Hardware	Stainless steel
Lens	Impact-resistant clear polycarbonate (CP)
Light source	Osram light emitting diodes (LED) 9W, 1100 lumens 25° square beam angle CCT 4000K 50,000 hour rated life
Power source	120V, 60Hz
Wiring	22.00 inch (559 mm) cord - standard Plug with recessed 3-prong IEC type (C-14) plug (120V, 60Hz only) - standard NEMA 5-15 plug option (120V, 60Hz only) (PLG) Push button switch on head option (SW)
Ambient operating temperature	-40°C to +50°C
Mounting	Stainless steel mounting bracket 0.53 inch (13.5 mm) mounting hole clearance
Estimated weight	Fixture: 2.7 lb (1.2 kg) Packaged: 3.0 lb (1.4 kg)
Warranty	5 years


For IES files, see website or contact factory

DLA 2 docklite®


9W Modular LED Loading Dock Light Head



Dimensions

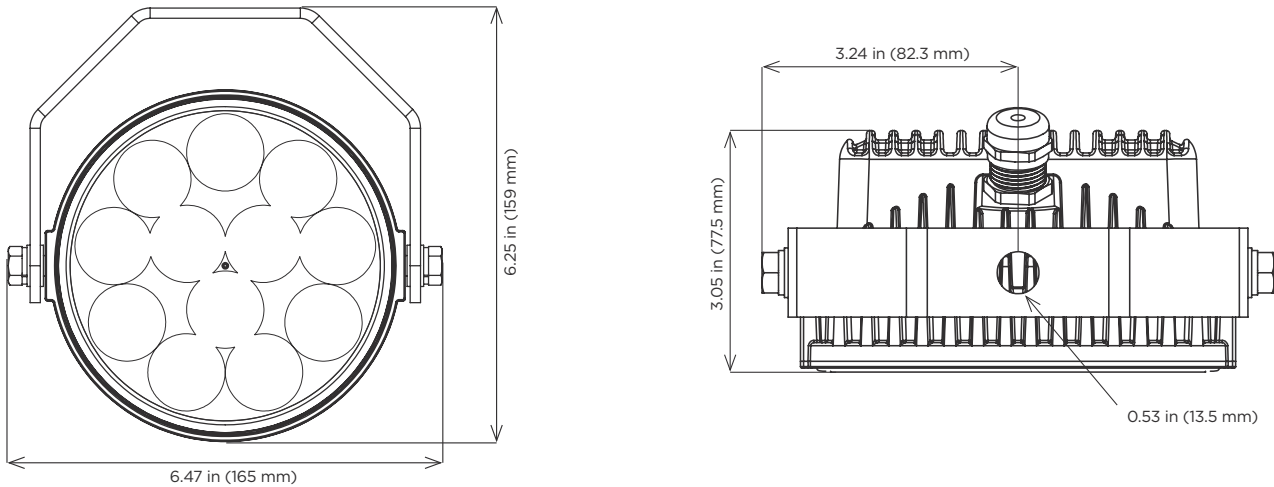


Accessories




Fan  
DL-FAN-18

Double Strut Arms

40 inch Arm Effective Reach

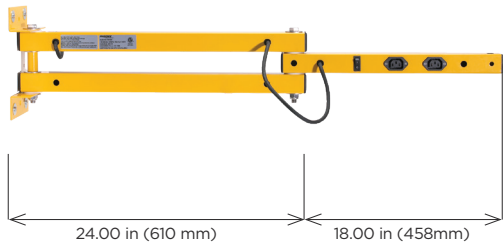

60 inch Arm Effective Reach

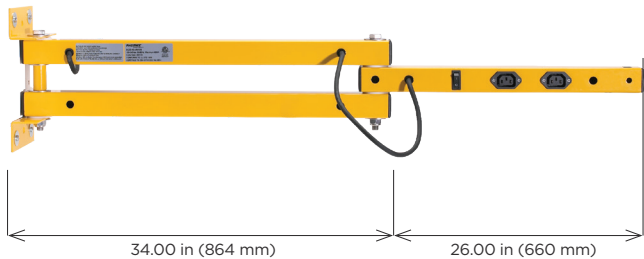

DLA 2 docklite®

9W Modular LED Loading Dock Light Head

Ordering Information

DLA 2 LED Head

Example: DLA2-12LED

Fixture	LED Count	Options <sup>3</sup>
DLA2	12LED	PLG <sup>1,2</sup>
		SW <sup>4</sup>

LED Count	Options <sup>3</sup>
12LED 12 LEDs, 19W, 1100 lumens	PLG <sup>1,2</sup> 22.00 inch (559 mm) cord with 120V, 60Hz NEMA 5-15 plug SW <sup>4</sup> Push button switch on head

- Notes
- 1 Plug is not suitable for wet environments
  - 2 Optional NEMA 5-15 plug cannot be used with Phoenix docklite® Arm (below)
  - 3 Fixture will come standard with recessed 3-prong IEC type (C-14) plug (120V, 60Hz only), which is necessary for use with Phoenix docklite® Arm (below)
  - 4 SW option is not required when using with Phoenix docklite® Arm (below), because power switch is standard on arm.

Modular Arm

Example: DL-40-ARM

Series	Length	Parts	Options <sup>3</sup>
DL	40 <sup>1</sup>	ARM	DS <sup>2</sup>
	60 <sup>1</sup>		

- Options <sup>3</sup>
- DS <sup>2</sup> double strut arm

- Notes
- 1 120V standard.
  - 2 Available in 40 and 60 inch lengths only. DL-FAN-18 requires 40 or 60 inch Double Strut Arm.

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.