

Patents Pending



Premium line of super rough service, heavy duty LED work lights
Lightweight, compact design ideal for use on mobile equipment
Customized optics designed to minimize glare, provide precise optical control and increase equipment efficiency
LED technology increases efficiency, eliminates maintenance and supports green initiatives

Key Applications

- Surface mining equipment
 - haul trucks • front loaders • blasthole drills • dozers • hydraulic excavator shovels
- Underground mining equipment
 - jumbos • scoopers • dumpers
- Construction equipment
 - mobile cranes • excavators • rollers
- Port equipment
 - material handling • reach stackers
- Marine vessels
 - patrol boats • fishing boats
- Agricultural equipment
 - combine harvester • tractors • ATVs
- Forestry equipment
 - harvesters • forwarders • loaders
- Other applications
 - utility vehicles • pick-up trucks • off-road equipment • forklift trucks • maintenance of Way (MOW) railroad maintenance equipment • solar and generator powered lighting

Compliances

- CE
- IP68
- IP69K
- IK06 (glass)
- IK10 (polycarbonate)

Wattage

	12V	24V	48V
HI	74W	64W	64W

Specifications

Construction	Die cast aluminum housing
Finish	Gray powder coat
Hardware	304 stainless steel external hardware
Lens	High temperature, impact-resistant polycarbonate (PC) or tempered glass (GL) Non-stick coating
Light source	Conformal coated LED circuit board 64W Cool white (5000K) LEDs - up to 7600 lumens Amber LEDs - up to 5000 lumens Spot (SP), Flood (FL) and No-Glare Driving & Perimeter (NG) optical patterns
Power source	12-48V DC; 24-48V DC Over-voltage , over-temperature and reverse polarity protection
Wiring	Stranded wires 10.00 inch cord with molded Deutsch connector
Ambient operating temperature	-40°C to +65°C Light output regulation in high ambient temperature environments protects the life of the LEDs
Shock	65G along 3 axes
Vibration	5 Grms, 100-2200Hz along 3 axes
Salt spray	Tested to ASTM B117 for 1000 hours
Aiming	120° aiming capability, 5° markings on mounting harp Colored aiming indicator designates fixture beam pattern (SP: red, FL: blue)
Mounting	304 stainless steel harp - standard
Weight	7.0 lb (3.2 kg)
Warranty	3 years


For IES files, see website or contact factory

Sturdilite® Master Series HI

Low-voltage LED Floodlight

PHOENIX®
DURABILITY X DESIGN™

Dimensions

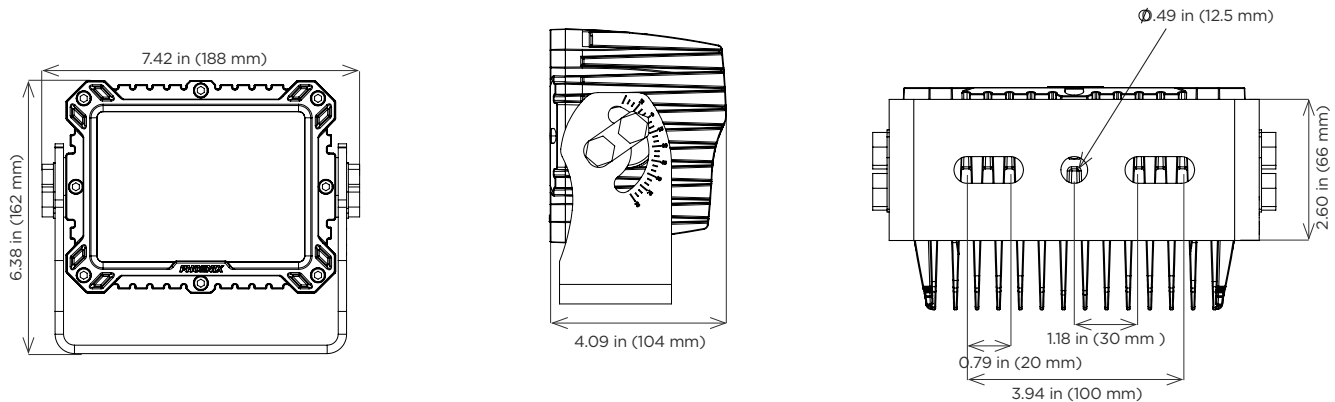

Ordering Information

Example: MST-HI-PC-SP-12-48

Fixture	Model	Lens	Optic	Voltage	Color Temperature ⁴
MST	HI	PC	SP	12-48	AM ^{2,3}
		GL ¹	FL	24-48 ²	
			NG		

Model	Lens	Optic
HI 64W	PC High temperature, impact-resistant polycarbonate	SP Spot Optic
	GL ¹ High temperature, tempered glass	FL Flood Optic
		NG No-Glare Driving & Perimeter Optic

Voltage	Color Temperature ⁴
12-48 12-48V DC	AM ^{2,3} Amber LEDs, ideal for high fog/dust/snow/debris
24-48 ² 24-48V DC	

Notes

- 1 GL option recommended for applications where excessive dirt/debris, humidity and heat are present
- 2 Contact factory for availability
- 3 Only available with GL option
- 4 Cool white (5000K) LEDs standard (leave blank)

Option (order separately)

Round Mounting Bracket

MST-HI-RND

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Product design and specifications are subject to change without notice. The most current version of this specification sheet can be found at www.phoenixlighting.com.