

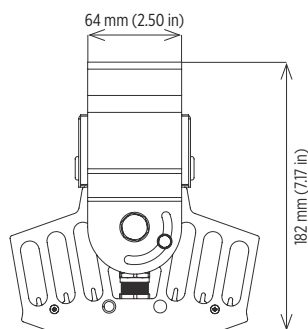


Marine Floodlight Waterline Security Light For SYM 303.X

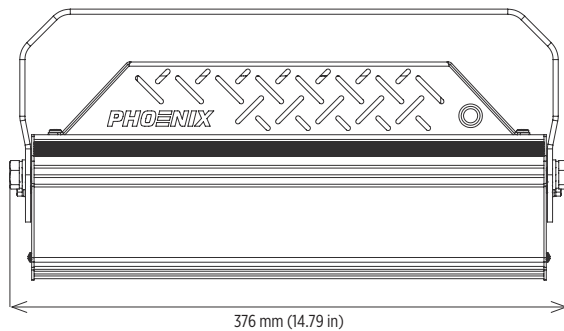

Industry leading above-deck floodlight
Stainless steel bracket and hardware for maximum corrosion resistance
IP66 and suitable for all demanding marine conditions
Designed and manufactured in the USA

Dimensions

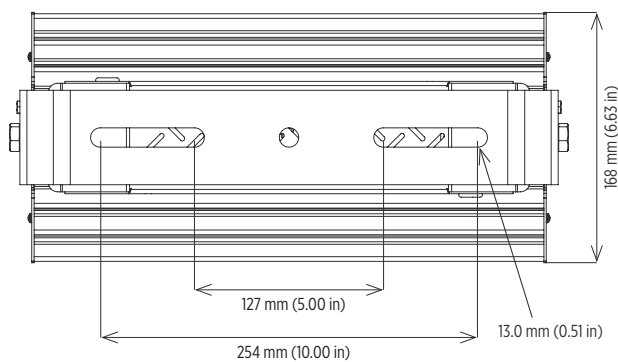

Specifications

Construction	Marine grade aluminum heat sink Adjustable 316 stainless steel mounting bracket (SSHRP) Adjustable aluminum mounting bracket (NPL)
Finish	Powder coated and anodized aluminum
Hardware	Marine grade (316) stainless steel
Lens	Weatherproof clear polycarbonate
Light source	Lumileds light emitting diodes (LED) 117W, up to 14,500 lumens Up to 123 lumens/watt Cool white (5000K), neutral white (4000K) and warm white (2700K) CRI > 70 50,000 hour rated life
Power source	120-277V, 50-60Hz Overload, over-voltage, over-temperature and short-circuit protection Potted driver
Surge protection	10kV/kA
Wiring	10 foot cord with pigtail 10 foot S00W cord with SYM 1218.3 plug (NPL) Optional junction box (JBOX)
Ambient operating temperature	-40°C to +50°C
Mounting	220° harp rotation Accommodates 2 inch pipe for waterline security lighting SYM 303.X (NPL)
Estimated fixture weight	13.0 lb (5.9 kg)
Safety Cable	Safety cable included
Warranty	5 years

Compliances (pending)

- ETL/cETL Certified to:
- UL 1598 Suitable for Wet Locations
 - UL 1598A Marine Outside Type (Saltwater)
 - CSA C22.2 No. 250.0

ABS
IP66
LM79 and LM80 reports available upon request



Marine Floodlight
Waterline Security Light

Ordering Information

Example: CF-125-MF-120-277-CW-SSHRP

Fixture	Optic	Voltage	CCT	Mounting Bracket	Option
CF-125	SP	120-277	CW	SSHRP	JBOX ¹
	MF		NW	NPL	
	WF		WW		


Optic	Voltage	CCT	Mounting Bracket	Option
SP Spot	120-277 120-277V, 50-60Hz	CW Cool white (5000K)	SSHRP Adjustable 316 stainless steel mounting bracket	JBOX ¹ Junction box
MF Medium flood		NW Neutral white (4000K)	NPL Adjustable waterline security bracket with SYM 1218.3 plug (replacement for SYM 303.X)	
WF Wide flood		WW Warm white (2700K)		

Notes

1 Contact factory

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Adjustable Waterline Security Bracket (NPL)

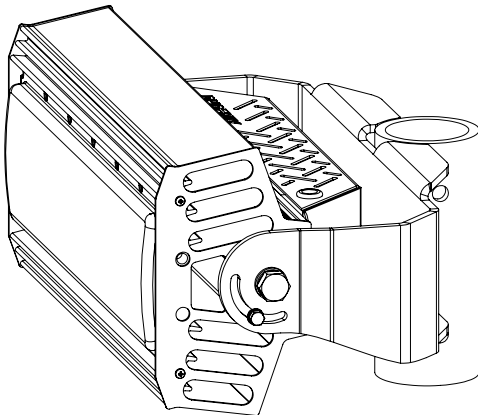

Note: LED replacement for SYM 303.X

Product design and specifications are subject to change without notice.