

## ! CAUTION

- Improper installation may result in serious injury and void warranty.

Included in the SturdiLED<sup>®</sup> Four Bolt Retrofit Kit: one (1) mounting base and one (1) spare M10 x 1.5 45mm bolt.

## Four Bolt Mounting Base Installation


- Remove washer and nut from the SturdiLED (keep hardware for later use).
- Insert the M10 x 1.5 threaded stud into the center hole on the mounting base. Refer to Figure 1.
- Reinstall the washer and nut. Tighten securely.

## Fixture Installation

- Identify the desired mounting location for the fixture. **Note:** The SturdiLED can be mounted in any orientation.
- The fixture should be mounted using the four holes supplied in the mounting base using customer supplied M10 or 3/8 inch hardware. Refer to mounting dimensions shown below.

The SturdiLED comes standard with a 72.00 inch (1829 mm) cord (pigtail). When wiring the fixture, refer to the SturdiLED<sup>®</sup> Installation Instructions.

Figure 1

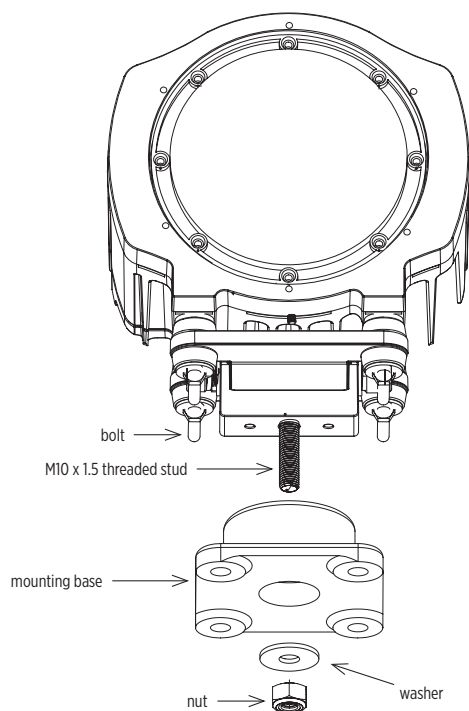

Mounting Dimensions

