

WASTEWATER LIGHTING



Guard Pro™ Series HAZARDOUS-RATED LOW-BAY & HIGH-BAY

Unleash up to 52,000 lumens of light in C1D2, C2D1, C2D2, and C3 environments. It's robust, IP66-sealed construction shrugs off corrosive vapors, high-pressure washdowns, dust and debris.

Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** 20W, 40W, 60W, 100W, 150W, 200W, 300W, 350W, 400W
- **Lumens:** 2,600; 5,200; 7,800; 13,000; 19,500; 26,000; 39,000; 45,000; 52,000
- **CCT:** 5000K; 4000K; 3000K; Amber




CVO 2 HAZARDOUS-RATED, FIELD-ADJUSTABLE LED AREA LIGHT

This flexible LED area is UL844 hazardous-rated and field-adjustable delivering up to 11,000 lumens at 75W with versatile option and mounting options.

Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** Field-adjustable output up to 75W
- **Lumens:** 6,500; 8,000; 11,000
- **CCT:** 5000K; 2200K; Amber

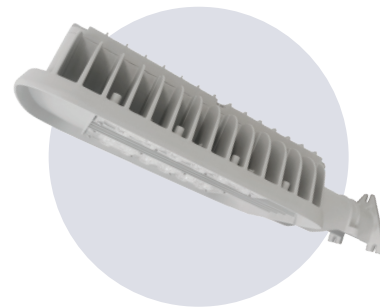

Defend Flood™ 2 Series EXPLOSION-PROOF LED FLOODLIGHT

This UL844 Class I, Division 1 explosion-proof floodlight offers a range of voltage, lumen, and mounting options, delivering reliable illuminations across many uses in demanding industrial settings. Available in two constructions: Defend Flood LO or HI.

Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** 40W; 60W; 100W; 200W
- **Lumens:** 5,600; 8,400; 14,000; 28,000
- **CCT:** 5000K; 4000K; 3000K



Command Flood® Series HAZARDOUS-RATED LED FLOODLIGHT

UL844 Class I, Division 2 hazardous-rated LED floodlight delivers 18,500-48,000 lumens with versatile optics and mount options. Available in three constructions: Command Flood 150, 250, or 375.

Key Specifications

- **Voltages:** 120-277VAC; 277-480VAC
- **Input Power:** 145W; 240W; 360W
- **Lumens:** 18,500; 32,000; 48,000
- **CCT:** 5000K; 4000K; 2700K



HDL-LED Series HEAVY DUTY LINEAR LED

This UL844 Class I, Division 2 series has a compact, low profile design. Available in 1-3 circuit boards.

Key Specifications

- **Voltage:** 120-277VAC, 277-480VAC, 12-24VDC
- **Input Power:** 28W, 55W, 84W
- **Lumens:** Up to 3,150; up to 6,300; up to 9,400
- **CCT:** 5000K; 4000K



Conquer Series Linear MID-WATT HIGH TEMPERATURE LINEAR

Available in 2- and 4-foot lengths for use in hazardous or high temperature applications.

Key Specifications

- **Voltage:** 120V or 277V
- **Input Power:** 60W, 80W
- **Lumens:** 6600, 9400
- **CCT:** 5000K



LFXB LED Series EXPLOSION-PROOF LINEAR LED

This UL844 Class I, Division 1 explosion-proof linear light is offered in a 2- and 4-foot EMB models.

Key Specifications

- **Voltage:** 120-277VAC
- **Input Power:** 35W; 65W
- **Lumens:** Up to 4,200 and up to 8,400
- **CCT:** 5000K; 4000K; 3000K



Conquer Series Flood HIGH TEMP RATED LED FLOOD/LOW BAY

Versatile mounting and retrofit options, rugged hazardous and high-temperature rated LED.

Key Specifications

- **Voltage:** 120V or 277V
- **Input Power:** 60W
- **Lumens:** 6000
- **CCT:** 5000K




LED VP Series HAZARDOUS-RATED, VAPORPROOF LED FIXTURE

This popular vaporproof Jelly Jar fixture is UL844 hazardous-rated and ABS certified making it ideal for walkway, doorway, and perimeter lighting within industrial and marine settings. Available in aluminum or brass.

Key Specifications

- **Voltages:** 120-277VAC; 24VDC option
- **Input Power:** 17W
- **Lumens:** Up to 1,900
- **CCT:** 5000K; 3000K

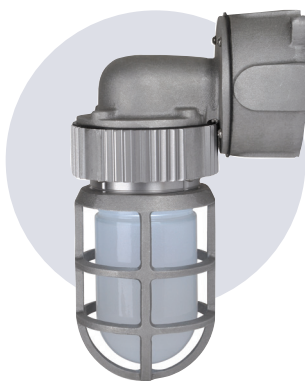

Wayfinder™ 2 ACCESSWAY LED FIXTURE

This accessway fixture delivers up to 1,300 lumens with wide beam light coverage, field-adjustable output and motion sensor compatibility, making it ideal for walkways, catwalks, and high-traffic pedestrian foot traffic areas. Available with a 2-hour EMB as well as clear, diffuse, red, green, or blue lens options.

Key Specifications

- **Voltages:** 120-277VAC
- **Input Power:** Field adjustable output up to 11W
- **Lumens:** Up to 1,300
- **CCT:** 5000K; 4000K; 2700K

